


CARBON MONOXIDE



1. PERFORMANCE



- 1) Measuring range : 25-1,000 ppm 5-300 ppm
 Number of pump strokes : 1 (100mℓ) 3 (300mℓ)
- 2) Sampling time : 3 minutes/1 pump stroke
- 3) Detectable limit : 1 ppm (300mℓ)
- 4) Shelf life : 3 years
- 5) Operating temperature : 0 ~ 40 °C
- 6) Reading : Concentration chart method
- 7) Colour change : Yellow → Dark brown

2. RELATIVE STANDARD DEVIATION

RSD-low : 5 % RSD-mid. : 5 % RSD-high : 5 %

3. CHEMICAL REACTION

Potassium disulphate palladate (II) is reduced, and Palladium is liberated.



4. CALIBRATION OF THE TUBE


STANDARD GAS CYLINDER METHOD

5. INTERFERENCE AND CROSS SENSITIVITY

Substance	ppm	Interference	ppm	Coexistence
Ethylene	5,000	Pale grey stain is produced.	5,000	The top of discoloured layer becomes unclear and higher readings are given.
Hydrogen	5,000	Greyish yellow stain is produced.	5,000	Whole layer is discoloured to Greyish yellow and the top of discoloured layer becomes unclear.
Acetylene	1.5	Dark green stain is produced.	CO conc. $\times 1/5$	Higher readings are given.
Sulphur dioxide	100	Original colour is faded.	∕	∕
Nitrogen dioxide		The accuracy of readings is not affected.	∕	∕

CARBON MONOXIDE LENGTH-OF-STAIN

FOR 1 PUMP STROKE (100mℓ)
ppm IN AIR CONCENTRATION

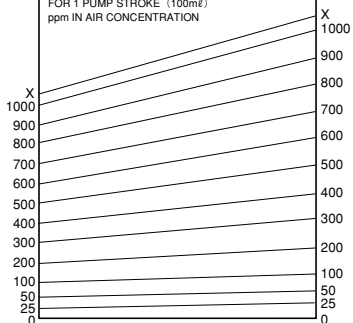

TEMPERATURE CORRECTION TABLE

Chart Readings (ppm)	Correct Concentration (ppm)				
	0 °C (32 °F)	10 °C (50 °F)	20 °C (68 °F)	30 °C (86 °F)	40 °C (104 °F)
1,000	870	930	1,000	1,030	1,060
900	780	840	900	930	960
800	690	750	800	830	850
700	610	660	700	720	740
600	520	560	600	620	640
500	430	470	500	520	540
400	350	370	400	410	430
300	260	280	300	310	320
200	180	190	200	210	220
100	90	100	100	100	110